

STANDARD SIGNS

NO.	SIGN DESIGNATION	SIGN DESIGNATION	SIGN SIZE	MOUNT	NUMBER REQUIRED
A		R11-2 (MOD.)	48"X30"	BARRICADE	2
B		R11-3a (MOD.)	60"X30"	BARRICADE	1
C		M4-10L	48"X18"	BARRICADE	2
D		M4-10R	48"X18"	BARRICADE	1
E		W20-2	48"X48"	2 POSTS	2
F		W20-3	48"X48"	2 POSTS	3
G		M4-9	30"X24"	1 POST	14
			48"X36"(**)	2 POSTS	0
H		M4-9L	30"X24"	1 POST	4
			48"X36"(**)	2 POSTS	0
J		M4-9R	30"X24"	1 POST	9
			48"X36"(**)	2 POSTS	0
K		M4-8a	24"X18"	1 POST	2


SPECIAL SIGNS

NO.	SIGN DESIGNATION	SIGN SIZE	MOUNT	NUMBER REQUIRED
S-1		30"X18"	1 POST	29
		42"X24"(**)	2 POSTS	5
S-2		4" X 4" X 4" X 4"	2 POSTS	3
S-3		4" X 4" X 4" X 4"	2 POSTS	2


(**) ON EXPRESSWAY ONLY

PREPARED BY: KC ENGINEERING AND LAND SURVEYING P.C.
ON: 7/7/15


ALTERED BY:
ON:

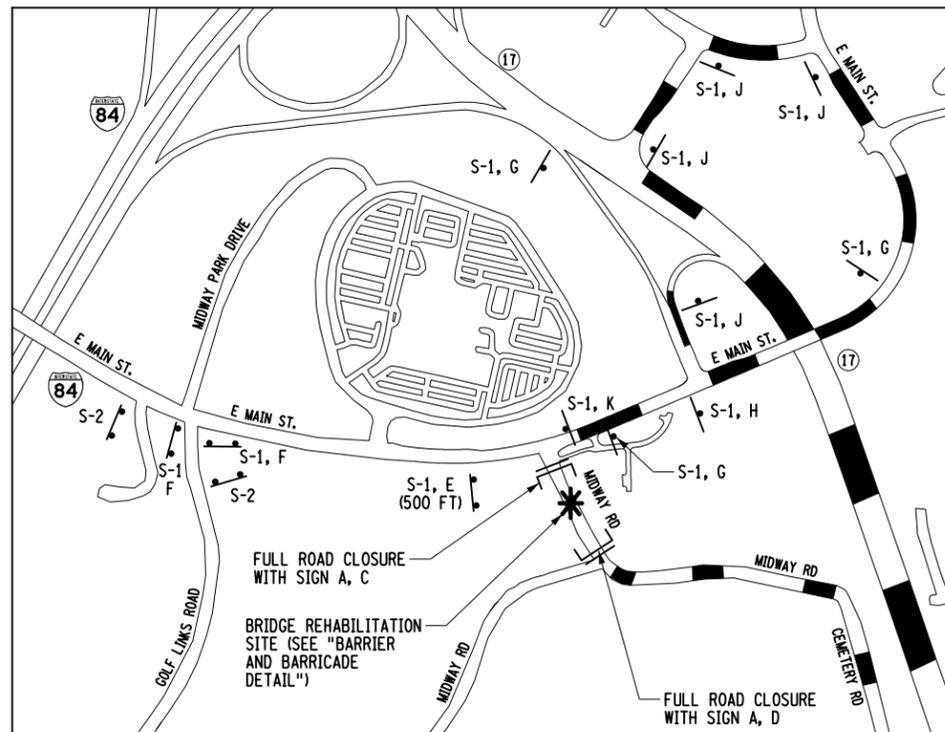

DETAIL A
N.T.S.

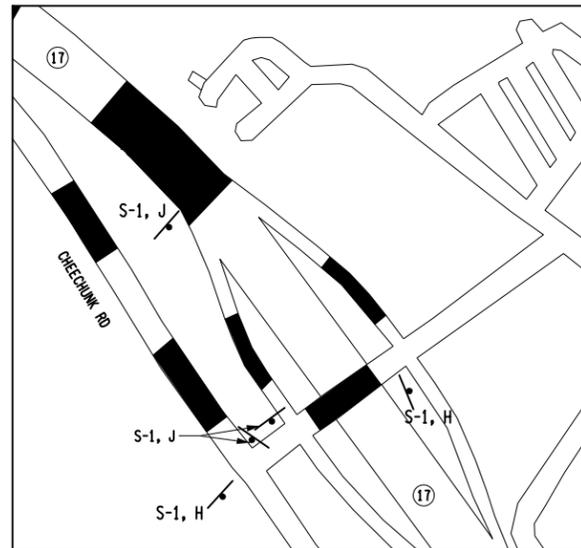

DETAIL B
N.T.S.

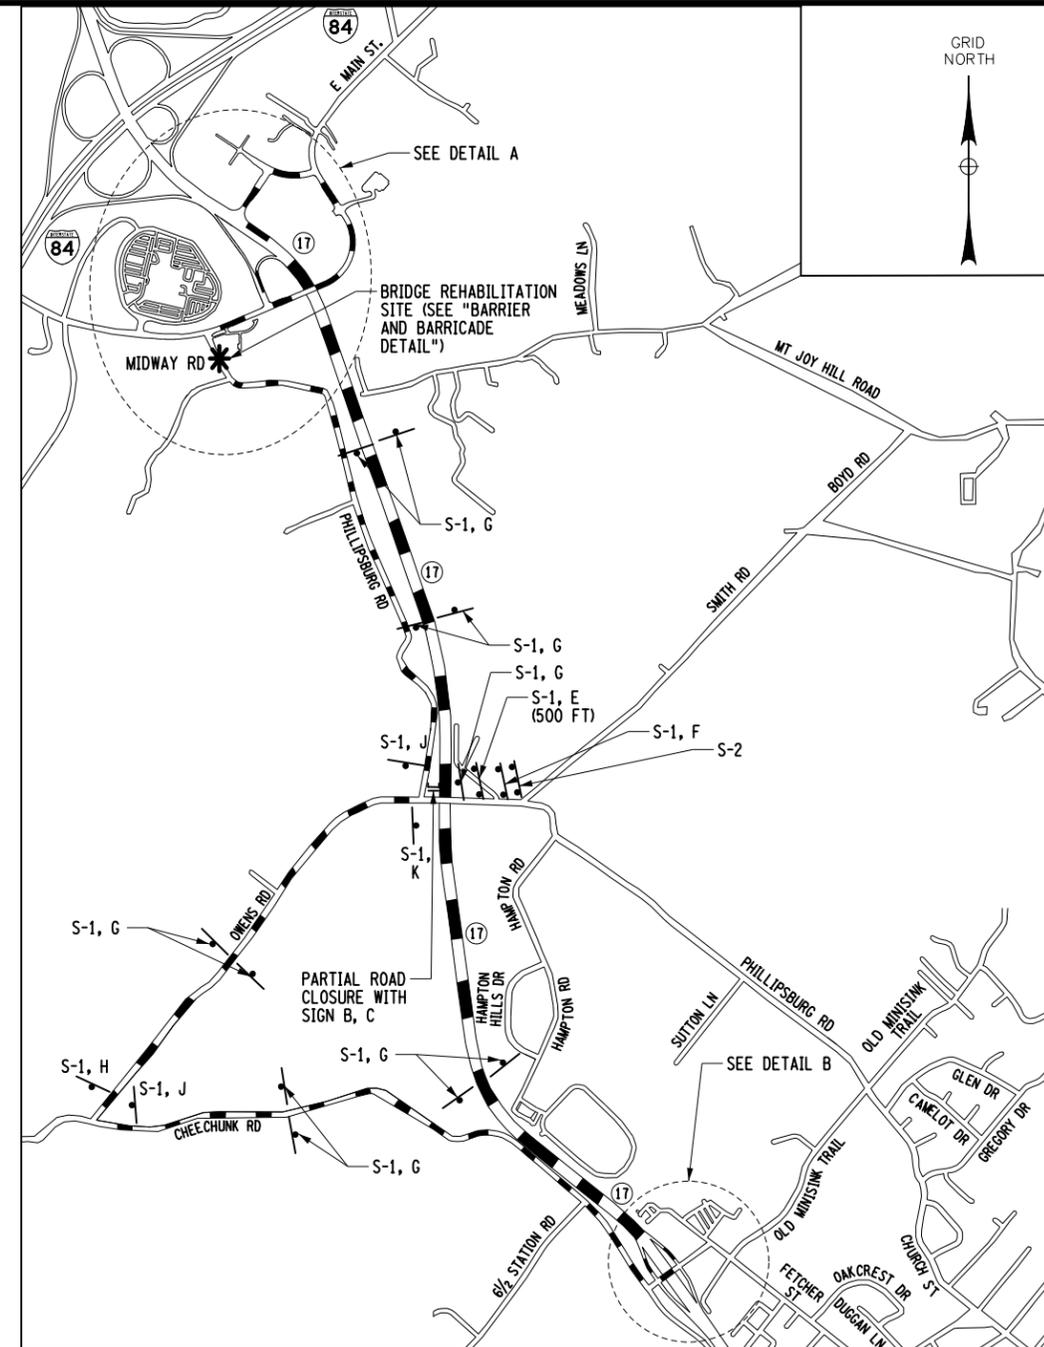


GENERAL NOTES:

- ONLY TYPE III CONSTRUCTION BARRICADES THAT ARE NCHRP-350 COMPLIANT SHALL BE USED; WOODEN BARRICADES ARE NOT ALLOWED. IN ADDITION, FLASHING/STEADY WARNING LIGHTS SHALL NOT BE AFFIXED TO ANY SIGN OR BARRICADE.
- THE ADVANCE WARNING SIGNS (S-3) ARE TO BE POSTED TWO WEEKS PRIOR TO THE EFFECTIVE DATE OF DETOUR, AND ARE TO BE REMOVED AT THE START OF CONSTRUCTION.
- POSITIVE CLOSURE SHALL BE MAINTAINED BETWEEN CONCRETE BARRIERS DURING NONWORKING HOURS.
- USE TYPE IX SHEETING FOR SIGNS.

LEGEND

- TYPE III CONSTRUCTION BARRICADE WITH SIGN(S) ITEM 619.04
- DETOUR SIGNS (30"X30" OR SMALLER)
- DETOUR SIGNS (30"X30" OR LARGER)

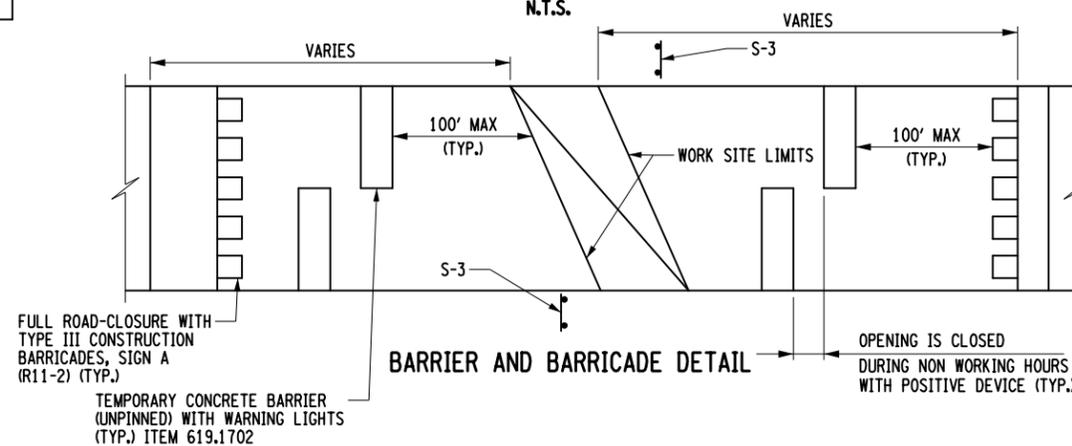

TOWN OF WALLKILL HIGHWAY DEPARTMENT
ORANGE COUNTY, NEW YORK

REHABILITATION OF
MIDWAY ROAD BRIDGE
MUD MILLS ROAD BRIDGE
NORTH GALLERIA DRIVE BRIDGE

WORK ZONE TRAFFIC CONTROL PLAN
MIDWAY ROAD BRIDGE

KC ENGINEERING & LAND SURVEYING, P.C.
370 7TH AVE. (SUITE 1604)
NEW YORK, NY 10001

DATE: 7/7/15
SHEET NO. 7 OF 28